




Product Technical Data Sheet

High Volume Peristaltic Pump - 230V AC AHP/100-230

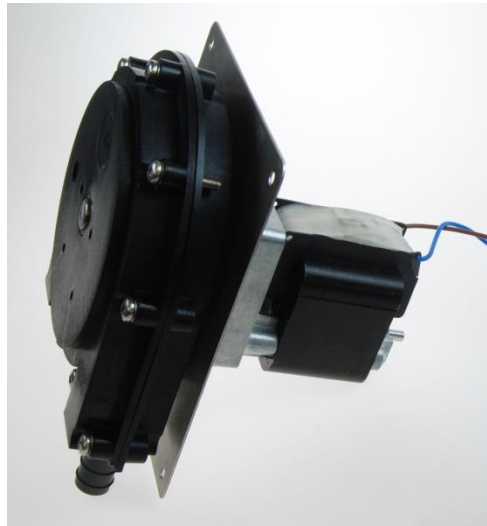

Properties

Motor/Gearbox: Anodised Aluminium/Copper

Pump Mounting Plate: Stainless Steel

Pump Housing: Glass filled Nylon

Inlet/Outlet Spigots: PVC, to suit 19 mm bore tube.

Other Parts: PVC Rollers; Stainless Steel Spinner Assembly.

Supply Voltage/Frequency: 230V 50Hz

Running Current: 1.3A

Capacity: Flow rate tested using water. Examples:

RPM	Tube material	Tube bore (mm)	Delivery Output (L/hour)
80	Santoprene	12.7	150
80	Santoprene	9.7	90

Dimensions: 18.5 x 15.5 x 19 cm

Net weight: 2.75 Kg

Fixing: Wall-mounted at a maximum height of 3 m from the drum.

Please refer to tube chart for chemical compatibility.

